



CRISTALLO 27M÷70M

Single Split

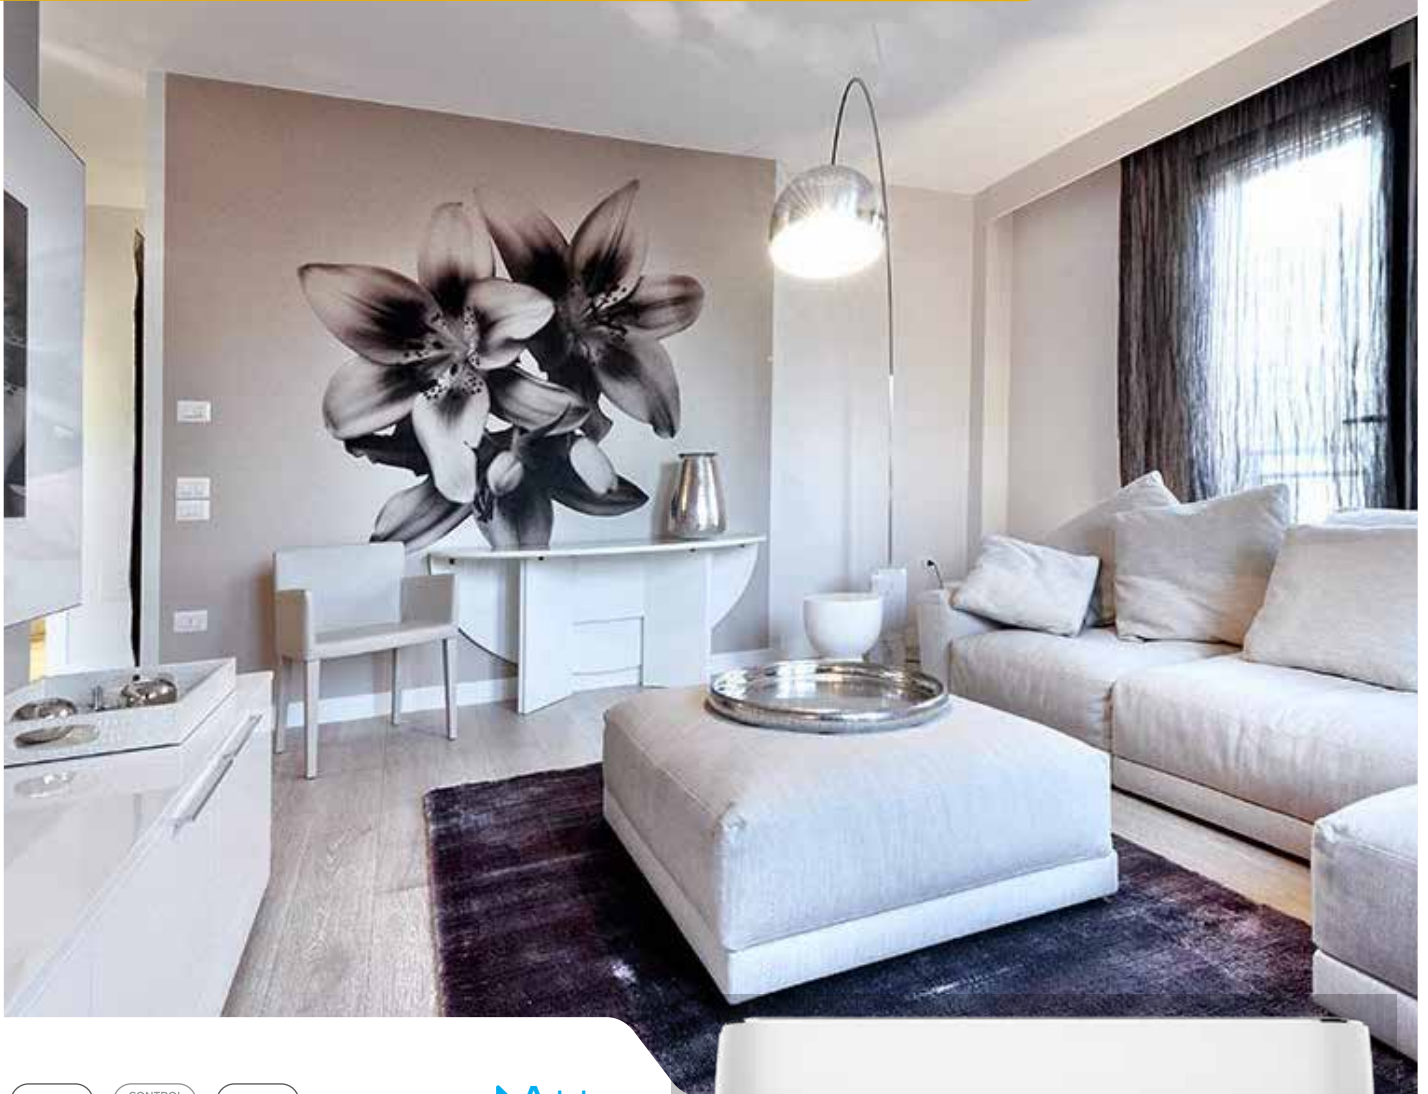

▶A++
▶A+

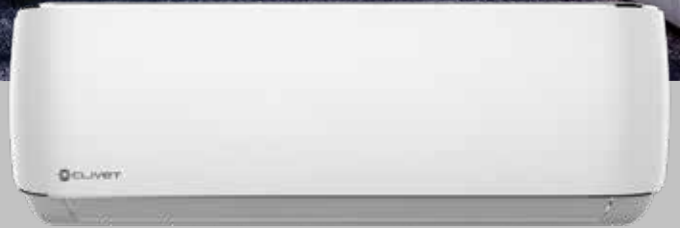

MONOSplit

CRISTALLO?

✓
NetHome Plus

✓
,

✓
MONOSplit/MULTISplit

:
Amazon Alexa Google Assistant



Single Split





Single Split




		27M	35M	53M	70M
	Min.~Max.)	Btu/h 9.000 (3.500~11.000)	12.000 (4.700~14.700)	18.000 (11.570~20.000)	24.000 (7.200~28.000)
	Min.~Max.)	2,6 (1,0~3,2)	3,5 (1,4~4,3)	5,3 (3,4~5,9)	7,0 (2,1~8,4)
	Min.~Max.)	Btu/h 10.000 (2.800~11.500)	13.000 (3.700~15.000)	19.000 (10.600~20.000)	25.000 (5.300~28.000)
	Min.~Max.)	2,9 (0,8~3,4)	3,8 (1,1~4,4)	5,6 (3,1~5,8)	7,3 (1,6~8,2)
	(Min.~Max.)	740 (80~1.100)	1.140 (120~1.650)	1.550 (560~2.050)	2.510 (420~3.200)
	(Min.~Max.)	780 (70~990)	1.080 (110~1480)	1.500 (780~2.000)	2.130 (300~3.100)
	(Min.~Max.)	A 4,95 (0,35~4,78)	5,10 (0,5~7,2)	6,7 (2,4~9)	10,9 (1,8~13,9)
	(Min.~Max.)	A 3,50 (0,32~4,32)	4,80 (0,5~6,4)	6,5 (3,4~8,7)	9,46 (1,4~14,4)
		- A++	A++	A++	A++
		2,7	3,5	5,3	7,0
	SEER	6,90	7,00	7,00	6,50
		/ 137	180	265	377
		- A+	A+	A+	A+
		2,7	2,9	4,1	4,9
	SCOP	4,00	4,10	4,00	4,00
		/ 945	990	1.435	1.730
		- A+++	A+++	A+++	A+++
	SCOP	5,30	5,40	5,10	5,10
	EER	3,56	3,27	3,23	3,25
	COP	3,76	3,71	3,71	3,80

		IM2-XY	27M	35M	53M	70M
			AAP4Q10001	AAP4Q20001	AAP4Q40001	AAP4Q60001
		x x	722x187x290	802x189x297	965x215x319	1080x226x335
		x x	790x270x375	875x285x380	1045x305x410	1155x415x320
	/		7,3/9,7	8,6/11,1	10,9/14,2	13,7/17,3
		-	CCF	CCF	CCF	CCF
	H/M/L	3/	416/309/230	584/477/395	730/500/420	1020/830/640
		/	1,0	1,2	1,8	2,7
	H	(A)	56	55	57	63
	H/M/L	(A)	39/32/26	39/32/26	43/33,5/28	47/41,5/30,5
		-	RG10A4-D-BGEF	RG10A4-D-BGEF	RG10A4-D-BGEF	RG10A4-D-BGEF
		°C	17~30	17~30	17~30	17~30
	/ /	/ /	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1

		MM2-Y	27M	35M	53M	70M
			AANMQ10001	AANMQ20001	AANMQ40001	AANMQ60001
		x x	720x270x495	720x270x495	805*330*554	890*342*673
		x x	835x300x540	835x300x540	915*370*615	995*398*740
	/		23,2/25	23,2/25	33,5/36,1	43,9/46,9
		(A)	63	63	65	67
		(A)	56	56	55,5	60,5
		°C	17~32	17~32	17~32	17~32
		°C BS	-15~50	-15~50	-15~50	-15~50
		°C	0~30	0~30	0~30	0~30
		°C BU	-15~30	-15~30	-20~30	-20~30
	/GWP	-	R-32 / 675	R-32 / 675	R-32 / 675	R-32 / 675
	/ /	/ /	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
50	MFA	A	20	20	20	30

SEER SCOP, EN 14825 ; EN14511/EN12102 ; 27° / 19° ; 35° . /24° . ; 20° / 15° ; CCF = H= ; M= ; L= ; S= ; 7° . /6° . ; UE 626/2011

			27M	35M	53M	70M
	L1		25	25	30	50
ODU/IDU	H1		±10	±10	±20	±25
		/	0,55 / 5	0,55 / 5	1,1 / 5	1,45 / 5
		CO ₂	0,37	0,37	0,74	0,98
		/	12	12	12	24
		/	Φ6,35 - 1/4"	Φ6,35 - 1/4"	Φ6,35 - 1/4"	Φ9,52 - 3/8"
		/	Φ9,52 - 3/8"	Φ9,52 - 3/8"	Φ12,7 - 1/2"	Φ15,9 - 5/8"

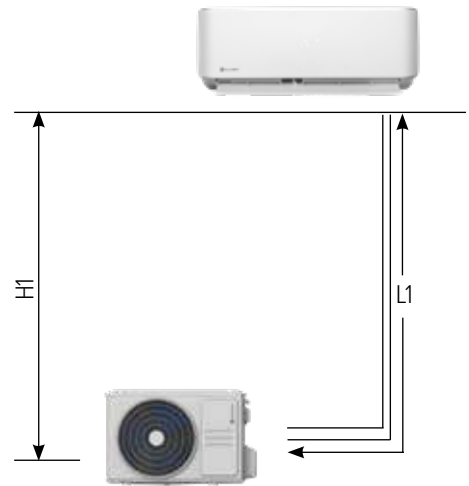

Single Split

		27M	35M	53M	70M
	V/Hz/n°	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
ODU	no. of cables / section	2 x 2,5mm ² + G	2 x 2,5mm ² + G	2 x 2,5mm ² + G	2 x 2,5mm ² + G
	no. of cables / section	2 x 1,5mm ²	2 x 1,5mm ²	2 x 1,5mm ²	2 x 2,5mm ²
	V/Hz/n°	from ODU	from ODU	from ODU	from ODU
IDU	no. of cables / section	2 x 1,5mm ² + G	2 x 1,5mm ² + G	2 x 1,5mm ² + G	2 x 2,5mm ² + G
	no. of cables / section	2 x 1,5mm ²	2 x 1,5mm ²	2 x 1,5mm ²	2 x 2,5mm ²

RG10A4-D-BGEF

CRISTALLO / ESSENTIAL 2

2022

NWMX

Wi-fi

MKSSX

XYE (

ON-OFF/Alarm/XYE/Wi-Fi

(" ")