

# CONSOLE 3 27M ÷ 53M

NEW PRODUCT

MULTISplit



## Console indoor unit for MULTI Split Systems

### WHY CHOOSE CONSOLE 3?

- ✓ MULTI Split/Light Commercial compatible
- ✓ Compact dimensions suitable for installation under a window
- ✓ Selection of active air supply nozzles according to the situation

### SUPERSILENT


Thanks to the new double tangential fan system, noise is reduced to the lowest of its category.



### DOUBLE FLOW FOR FRONT RETURN AIR SUPPLY

Selectable air supply:

1. From the bottom and from the top
2. From the top only
3. Return air from the front

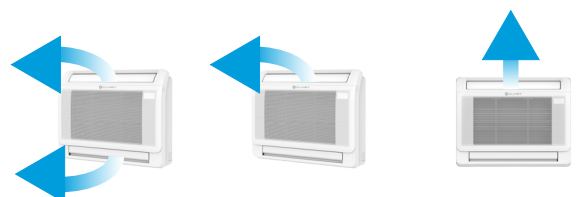

## COMFORT



Stepless  
Indoor Fan  
Speed



Anti-cold air



Temperature  
Compensation



Multidirectional  
airflow

## RELIABILITY



Self-diagnosis  
Function



Emergency  
Function

## CONVENIENCE



Remote  
On/Off



Timer



Auto-restart

## ENERGY SAVING



Sleep



Gear

## OPTIONAL



Centralised  
control



BMS  
Communication



WiFi Control

## HEALTH



High Density  
filter



Cold Catalyst  
filter



Wi-Fi  
NWMX  
(optional)



WIRED REMOTE  
CONTROL  
KJR-120X2-TFBG-E  
(optional)



REMOTE CONTROL  
RG10A-D2S-BGEF  
(standard)



IC3-Y

## technical data

Indoor unit			IC3-Y	27M	35M	53M
Article code				89472268	89472266	89472269
Cooling capacity	Nominal		Btu/h	9.000	12.000	17.000
			kW	2,64	3,52	5
Heating capacity	Nominal		Btu/h	10.000	13.000	18.000
			kW	2,93	3,81	5,28
Dimensions	Unit	L x D x H	mm	794x206x621	794x206x621	794x206x621
	Packaging	L x D x H	mm	865x280x719	865x280x719	865x280x719
System weight	Unit/Packaging		kg	14,9/18,8	14,9/18,8	14,9/18,8
Air filter	Type			-	CCF	-
Airflow		Hi/Mid/Lo	m <sup>3</sup> /h	650/580/490	650/580/490	780/690/600
Sound power		Hi	dB(A)	54	54	55
Sound pressure level		Hi/Mid/Lo	dB(A)	37/34/27	37/34/27	41/38/32
Operating Voltage Range	Cooling	Indoor T	°C	16°32	16°32	16°32
	Heating	Indoor T	°C	0°30	0°30	0°30
Refrigerant piping	External diameters	Liquid-Gas	mm	Φ6,35 - Φ9,52	Φ6,35 - Φ9,52	Φ6,35 - Φ12,7
			inch.	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"
Control system	Infrared remote control		-		RG10A-D2S-BGEF	
	Settable temperature		°C		16°30	
Power supply	Voltage/Frequency/Phases		V/Hz/n°		230 / 50 / 1	

R/W = Removable/Washable

Test conditions:

according to EN14511 / EN12102

Cooling: indoor air temperature 27°C DB/19°C WB; outdoor air temperature 35°C DB/24°C WB;

Heating: indoor air temperature 20°C DB/15°C WB; outdoor air temperature 7°C DB/6°C WB.

Data declared according to UE 626/2011 delegated regulation

## accessoires

Standard	
<b>RG10A-D2S-BGEF</b>	Infrared remote control for indoor units EZCool / BOX 2 / CONSOLE 3 / DUCT 2 / C&F 2
Optionals	
<b>NWMX</b>	Wi-fi kit for indoor units
<b>MKCX</b>	Multifunction board providing remote ON/OFF, alarm and XYE port <i>The ON-OFF/Alarm/XYE/Wi-Fi port functions can be used simultaneously</i>
<b>Control systems</b>	(see dedicated section)